

# Technical data sheet



## Product features

### Fry-top griddle plate electric grooved counter top 230 V

<b>Model</b>	<b>SAP Code</b>	00002994
--------------	-----------------	----------



- Top type: Grooved
- Griddle dimensions [mm x mm]: 570 x 240
- Griddle thickness [mm]: 8.00
- Container for liquid fat: Yes
- Independent heating zones: Separate control for each heating zone
- Maximum device temperature [°C]: 300
- Surface finish: sandblasted surface without coating

<b>SAP Code</b>	00002994	<b>Power electric [kW]</b>	2.400
<b>Net Width [mm]</b>	593	<b>Loading</b>	230 V / 1N - 50 Hz
<b>Net Depth [mm]</b>	356	<b>Griddle dimensions [mm x mm]</b>	570 x 240
<b>Net Height [mm]</b>	185	<b>Top type</b>	Grooved
<b>Net Weight [kg]</b>	16.50		


# Technical data sheet



Technical drawing

## Fry-top griddle plate electric grooved counter top 230 V

Model	SAP Code	00002994
-------	----------	----------

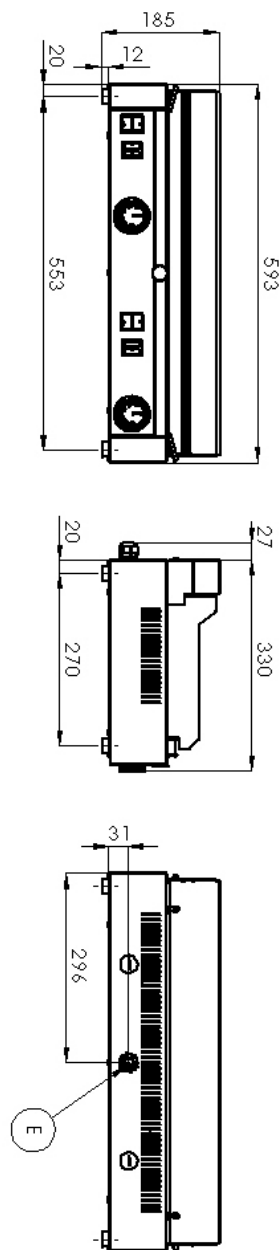

# Technical data sheet



Product benefits

## Fry-top griddle plate electric grooved counter top 230 V

<b>Model</b>	<b>SAP Code</b>	00002994
--------------	-----------------	----------

**1**

### Small dimensions

low space requirements

- also usable for stall sales

# Technical data sheet



## Technical parameters

### Fry-top griddle plate electric grooved counter top 230 V

<b>Model</b>	<b>SAP Code</b>	00002994
--------------	-----------------	----------

**1. SAP Code:**

00002994

**2. Net Width [mm]:**

593

**3. Net Depth [mm]:**

356

**4. Net Height [mm]:**

185

**5. Net Weight [kg]:**

16.50

**6. Gross Width [mm]:**

470

**7. Gross depth [mm]:**

640

**8. Gross Height [mm]:**

230

**9. Gross Weight [kg]:**

17.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Table top

**12. Power electric [kW]:**

2.400

**13. Loading:**

230 V / 1N - 50 Hz

**14. Protection of controls:**

IPX4

**15. Material:**

Stainless steel

**16. Indicators:**

operation and warm-up

**17. Surface finish:**

sandblasted surface without coating

**18. Maximum device temperature [°C]:**

300

**19. Minimum device temperature [°C]:**

50

**20. Adjustable feet:**

Yes

**21. Griddle dimensions [mm x mm]:**

570 x 240

**22. Griddle thickness [mm]:**

8.00

**23. Container for liquid fat:**

Yes

**24. Independent heating zones:**

Separate control for each heating zone

**25. Uniform heating:**

Yes

**26. Top type:**

Grooved

**27. Power consumption of the zone 1 [kW]:**

1,2

**28. Power consumption of the zone 2 [kW]:**

1,2