



Undercounter dishwasher double skin 40x40 - 230 V

Model SAP Code 00011269



- Display type: ProScreen 4 digit display + 2 LED bars
- Number of programs: 5
- Number of skin: 2
- Door clear height [mm]: 320
- Rack size [mm]: 400 x 400
- Water consumption of the washing cycle: 1,9
- Washing cycle time [s]: 90-120-150
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes double filtration with overflow discharge ensures only 18% loss of clean water to waste


SAP Code	00011269	Boiler power [kW]	2.600
Net Width [mm]	556	Basin volume [l]	8
Net Depth [mm]	466	Tank power [kW]	0.600
Net Height [mm]	695	Water consumption of the washing cycle	1,9
Net Weight [kg]	45.00	Washing cycle time [s]	90-120-150
Power electric [kW]	3.500	Door clear height [mm]	320
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400
Boiler capacity [l]	2.60		




Technical drawing

Undercounter	dichwachar	' double skin	140v40 .	. 23N W

Model SAP Code 00011269



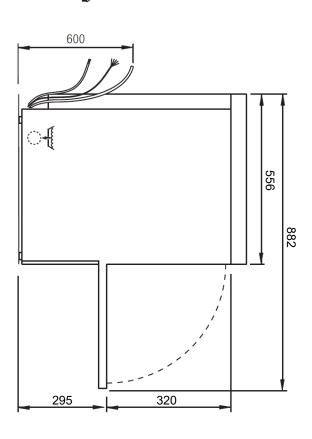





Undercounter dishwasher double skin 40x40 - 230 V

Model SAP Code 00011269

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life
- Washing arms with a component, common for washing and rinsing

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort
- LED Display

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault
- Double pump
 unique two-way DuoFlow pump

inique two-way buor low pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump
- Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life
- Detergent dispensers
 two detergent and rinse aid dispensers

two detergent and mise aid dispensers

- precise chemical dosing by ProDose precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel
- **Double filter system**the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
 - higher washing efficiency; longer life of the washing bath

Fast heating

Performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation
- Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils
- Double shell construction
 - stainless steel construction with insulated double jacket $\,$
 - quiet operation
 - energy saving
- Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving
- Fast heating

performance management allows the current running of the boiler and basins body

- quick fault finding
- transfer of original recipes
- keeping software up to date

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

2024-02-13

2



Technical parameters

Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011269
1. SAP Code: 00011269		15. Loading: 230 V / 1N - 50 Hz
2. Article group: Dishwashers line N		16. Number of programs: 5
3. Net Width [mm]: 556		17. Opening of device: Tilting down
4. Net Depth [mm]: 466		18. Door clear height [mm]: 320
5. Net Height [mm]: 695		19. Inlet pressure: 2-4bar
6. Net Weight [kg]: 45.00		20. Adjustable feet: Yes
7. Gross Width [mm]: 516		21. Number of skin:
8. Gross depth [mm]: 606		22. Self-cleaning cycle: Yes
9. Gross Height [mm]: 745		23. Boiler capacity [l]: 2.60
10. Gross Weight [kg]: 48.00		24. Boiler power [kW]: 2.600
11. Device type: Electric unit		25. Basin volume [l]:
12. Control type: Digital		26. Tank power [kW]: 0.600
13. Material: Stainless steel		27. Number of arms for both rinsing and washing:

3.500

14. Power electric [kW]:

28. Arm connection:

Click-clack - easy removal with one hand





Undercounter dishwasher double skin 40x40	- 230 V
Model SAP Code	00011269
20. Washing arm types	41. Energy Saving system:
29. Washing arm type: Rotatable two-pronged	Energy Saving System: Energy Saving - Energy saving system due to lowering the boiler temperature
30. Washing arm material: Composite	42. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
31. Rinsing arm type: Rotating two-pronged	43. Hot water electric valve: Yes
32. Rinsing arm material: Composite	44. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
33. Deep drawn tank: Yes	45. Rack size [mm]: 400 × 400
34. Rack support: Pressed	46. Display type: ProScreen - 4 digit display + 2 LED bars
35. Tank surface strainers: composite	47. USB port: Yes, for Firmware actualisation
36. Drain filter: ArchiMedes - double filtration with overflow disc ensures only 18% loss of clean water to waste	48. Self-diagnostics: charge Yes
37. Thermostop: Yes	49. Wash pump type: two-way - DuoFlow
38. Boiler thermostat adjust: Yes	50. Detergent dispenser: Yes
39. Rack feed capacity: 24-30-40	51. Rinse aid dispenser: Yes

40. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

1,9

52. Water consumption of the washing cycle:



Technical parameters

Undercounter dishwasher double skin 40x40 - 230 V		
Model	SAP Code	00011269

53. Washing cycle time [s]:

90-120-150

54. Rinse water temperature [°C]:

65

55. Standard equipment for device:

1x glass basket, 1x plate basket, 1x cutlery basket

56. Additional information:

The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free

57. Program ProSpeed:

Yes

58. Program ProFessional:

Yes

59. Program ProTemp:

Ye:

60. Program ProSelf:

Yes

61. Program ProPlates:

Yes