

# Technical data sheet

## Product features



### Undercounter dishwasher double skin 50x50 - 400 V

<b>Model</b>	<b>SAP Code</b>	00011273
--------------	-----------------	----------



- Display type: LCD multifunction display
- Number of programs: 13
- Number of skin: 2
- Door clear height [mm]: 385
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle: 2,2
- Washing cycle time [s]: 90-120-150
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

<b>SAP Code</b>	00011273	<b>Boiler power [kW]</b>	6.000
<b>Net Width [mm]</b>	600	<b>Basin volume [l]</b>	15
<b>Net Depth [mm]</b>	600	<b>Tank power [kW]</b>	1.400
<b>Net Height [mm]</b>	820	<b>Water consumption of the washing cycle</b>	2,2
<b>Net Weight [kg]</b>	55.00	<b>Washing cycle time [s]</b>	90-120-150
<b>Power electric [kW]</b>	7.900	<b>Door clear height [mm]</b>	385
<b>Loading</b>	400 V / 3N - 50 Hz	<b>Rack size [mm]</b>	500 x 500
<b>Boiler capacity [ l ]</b>	6.00		



# Technical data sheet

Technical drawing



## Undercounter dishwasher double skin 50x50 - 400 V

Model	SAP Code	00011273
-------	----------	----------

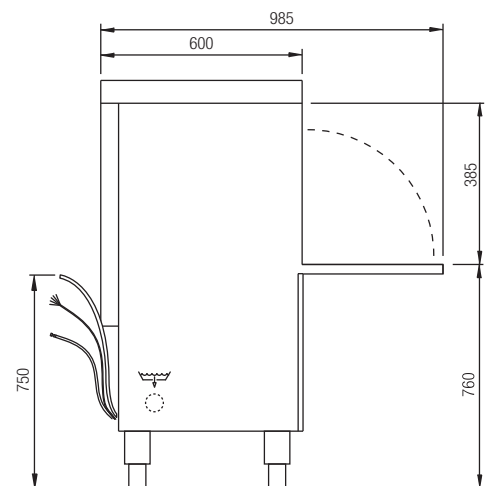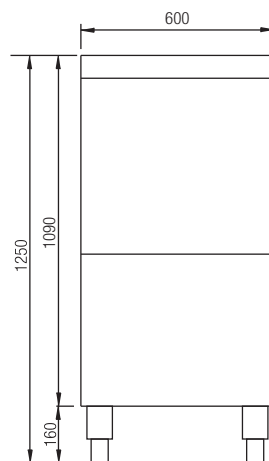

Adjustable feet of +/- 30 mm height

# Technical data sheet

## Product benefits



### Undercounter dishwasher double skin 50x50 - 400 V

Model	SAP Code	00011273
-------	----------	----------

1

#### Stainless steel outer shell construction

- round construction with stainless steel, rounded edges, Deep-drawn bathtub
- easy cleaning, high hygiene standard, long service life

2

#### Stainless steel washing arms

- upper and lower stainless steel swivel arms common
- easy and safe handling during cleaning
  - increased user comfort

3

#### LED Display

- proScreen 4 local display + 2 LED strips
- easy control of the dishwasher operation, continuous information about the status of the wash cycle,
  - diagnostics in case of malfunction

4

#### Two-way pump

- unique two-way DuoFlow pump
- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

#### Molded basket supports

- guide rails for the baskets molded from the body of the dishwasher
- high hygiene standard
  - longer service life

6

#### Detergent dispensers

- two detergent and rinse aid dispensers
- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

#### Double filter system

- the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
- higher washing efficiency; longer life of the washing bath

8

#### Fast heating

- Performance management allows the current running of the boiler and basins body
- quick first warm-up of the dishwasher
  - smooth operation

9

#### Protection of fragile dishes

- softstart system for gradual start of washing programs to protect fragile dishes
- protects stemmed glasses and other fragile utensils

10

#### Double shell construction

- stainless steel construction with insulated double jacket
- quiet operation
  - energy saving

11

#### Energy saving

- energy saving energy saving system due to lowering the temperature of the boiler
- cost saving

12

#### Fast heating

- performance management allows the current running of the boiler and basins body
- quick fault finding
  - transfer of original recipes
  - keeping software up to date

# Technical data sheet

## Technical parameters



### Undercounter dishwasher double skin 50x50 - 400 V

**Model**

**SAP Code**

00011273

**1. SAP Code:**

00011273

**2. Article group:**

Dishwashers line TT

**3. Net Width [mm]:**

600

**4. Net Depth [mm]:**

600

**5. Net Height [mm]:**

820

**6. Net Weight [kg]:**

55.00

**7. Gross Width [mm]:**

650

**8. Gross depth [mm]:**

650

**9. Gross Height [mm]:**

870

**10. Gross Weight [kg]:**

63.00

**11. Device type:**

Electric unit

**12. Control type:**

Digital

**13. Material:**

Stainless steel

**14. Power electric [kW]:**

7.900

**15. Loading:**

400 V / 3N - 50 Hz

**16. Number of programs:**

13

**17. Opening of device:**

Tilting down

**18. Door clear height [mm]:**

385

**19. Adjustable feet:**

Yes

**20. Number of skin:**

2

**21. Self-cleaning cycle:**

Yes

**22. Boiler capacity [ l ]:**

6.00

**23. Boiler power [kW]:**

6.000

**24. Basin volume [l]:**

15

**25. Tank power [kW]:**

1.400

**26. Number of arms for both rinsing and washing:**

2

**27. Arm connection:**

Hand loosen/tighten screw

**28. Washing arm type:**

Rotatable two-pronged

# Technical data sheet

## Technical parameters



### Undercounter dishwasher double skin 50x50 - 400 V

**Model**

**SAP Code**

00011273

**29. Washing arm material:**

Stainless steel

**30. Atmospheric boiler with rinse pump:**

Yes

**31. Rinsing arm type:**

Rotating two-pronged

**32. Rinsing arm material:**

Stainless steel

**33. Deep drawn tank:**

Yes

**34. Rack support:**

Pressed

**35. Tank surface strainers:**

stainless steel

**36. Drain filter:**

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

**37. Thermostop:**

Yes

**38. Boiler thermostat adjust:**

Yes

**39. Rack feed capacity:**

60-40-20

**40. Detergent and rinse pump system:**

ProDose - accurate dosing with a peristaltic pump

**41. Energy Saving system:**

EnergySaving - Energy saving system due to lowering the boiler temperature

**42. Rinse system:**

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

**43. Heating system:**

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

**44. Quick heating system:**

QuickReady - System for rapid heating of water in the tank

**45. Hot water electric valve:**

Yes

**46. Closing door system:**

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

**47. Rack size [mm]:**

500 x 500

**48. Display type:**

LCD multifunction display

**49. USB port:**

Yes, for Firmware actualisation

**50. Drain pump:**

Yes

# Technical data sheet

## Technical parameters



### Undercounter dishwasher double skin 50x50 - 400 V

**Model**

**SAP Code**

00011273

**51. Self-diagnostics:**

Yes

**52. Wash pump type:**

two-way - DuoFlow

**53. Detergent dispenser:**

Yes

**54. Rinse aid dispenser:**

Yes

**55. Water consumption of the washing cycle:**

2,2

**56. Washing cycle time [s]:**

90-120-150

**57. Rinse water temperature [°C]:**

80

**58. Standard equipment for device:**

1x glass basket, 1x plate basket, 1x cutlery basket

**59. Additional information:**

The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free

**60. Program ProSpeed:**

Yes

**61. Program ProFessional:**

Yes

**62. Program ProTemp:**

Yes

**63. Program ProClean:**

Yes

**64. Program ProDrain:**

Yes

**65. Program ProEco:**

Yes

**66. Program ProNew:**

Yes

**67. Program ProLong:**

Yes

**68. Program ProGlass:**

Yes

**69. Program ProWater:**

Yes

**70. Program ProActive:**

Yes

**71. Program ProSteel:**

Yes

**72. Program ProSan:**

Yes