Product features



| Pizza oven 2 chambers 8x d=33 cm | | | | |
|----------------------------------|----------|---|-----|--|
| Model | SAP Code | 00006148 | | |
| | | Pizza capacity [cm]: 8x 33 cm Stoneplates: Lower Stone plates thickness [mm]: 14 Material: Stainless steel Control type: Mechanical Type of handle: Short, plastic Steam protection: Yes Independent heating zones: Sepa each chamber Chimney for moisture extraction: T Adjustable chimney: Yes Interior lighting: Yes | | |
| SAP Code | 00006148 | Minimum device tem- perature [°C] | 50 | |
| Net Width [mm] | 975 | Maximum device tem- perature [°C] | 450 | |
| Net Depth [mm] | 835 | Width of internal part [mm] | 700 | |
| Net Height [mm] | 763 | Depth of internal part [mm] | 700 | |
| Net Weight [kg] | 123.00 | Height of internal part [mm] | 150 | |

Loading 400 V / 3N - 50 Hz

9.600

8x 33 cm


Power electric [kW]


Pizza capacity [cm]


Technical drawing





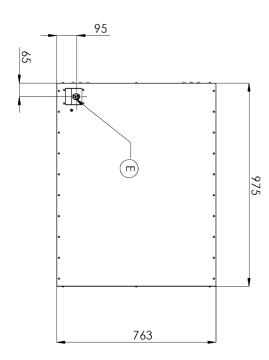

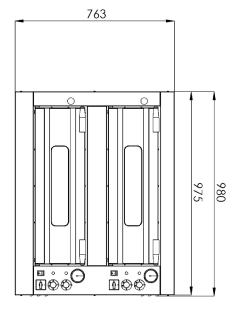

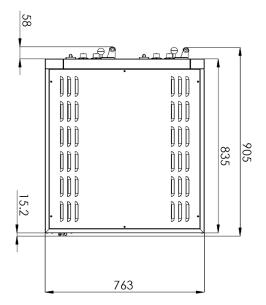

Product benefits



| Pizza oven 2 chambers 8x d=33 cm | | | |
|----------------------------------|--|--|----------|
| Model | | SAP Code | 00006148 |
| 1 | Manual controls - Set val clear and simple user-friendly – quick and easy for the use required for operationlon | temperature settings er to operate, no training | |
| 2 | Chamber heating in the t of 50 to 450°C the temperature range enables types of dough and meat; can - we have a crispy pizza in a a pizza according to the d not wait long and the ope customers - multiple turn | s the preparation of various also be used for baking a short time - I can make ough, the customer does rator serves multiple | |
| 3 | Fireclay plate 14mm place under the plate proper accumulation and unif - no scorching and the pizz does not burn, no temper need for the cook to check lower demands on the kn the pizza maker | ormity of heat distribution a is evenly cooked and ature fluctuation, no k and adjust the baking, | |
| 4 | Glass set in the door checking the product during h having to open the door - I don't lose temperature v unnecessarily opening the saving energy | vhen baking by | |
| 5 | 2x thermostat, separate lower heaters more precise regulation of heat to the type of dough or food - better final quality of the variability - suitable for di comfort for the experience professionals | t in the chamber, according product; no burning, ferent treatments, better | |
| 6 | Analog thermometer me temperature in the cham certainty of the set temperatur set correctly and that the devic – I am aware of and can rea required temperatures | ber e, I will check whether it is se works correctly for me | |

Technical parameters



| Pizza oven 2 chambers 8x d=33 cm | | | | |
|---|----------|--|--|--|
| Model | SAP Code | 00006148 | | |
| | | | | |
| 1. SAP Code: 00006148 | | 15. Width of internal part [mm]: | | |
| 2. Net Width [mm]: 975 | | 16. Depth of internal part [mm]: 700 | | |
| 3. Net Depth [mm]: 835 | | 17. Height of internal part [mm]: 150 | | |
| 4. Net Height [mm]: 763 | | 18. Minimum device temperature [°C]: 50 | | |
| 5. Net Weight [kg]: 123.00 | | 19. Maximum device temperature [°C]: 450 | | |
| 6. Gross Width [mm]: 1030 | | 20. Pizza capacity [cm]: 8x 33 cm | | |
| 7. Gross depth [mm]: 930 | | 21. Thermometer: Analog | | |
| 8. Gross Height [mm]: 790 | | 22. Indicators: operation | | |
| 9. Gross Weight [kg]: 125.00 | | 23. Number of internal parts: 8 | | |
| 10. Material: Stainless steel | | 24. On/Off button: Yes | | |
| 11. Device type: Electric unit | | 25. Type of handle: Short, plastic | | |
| 12. Power electric [kW]: 9.600 | | 26. Steam protection: Yes | | |
| 13. Loading: 400 V / 3N - 50 Hz | | 27. Protection of controls: IPX4 | | |
| 14. Control type: Mechanical | | 28. Stoneplates: Lower | | |

Technical parameters



| Pizza oven 2 chambers 8x d=33 cm | | | | |
|--|----------|--|--|--|
| Model | SAP Code | 00006148 | | |
| | | | | |
| | | | | |
| 29. Stone plates thickness [mm]: | | 33. Number of cavities: | | |
| | | | | |
| 30. Independent heating zones: Separate control for each chamber | | 34. Chimney for moisture extraction: Yes | | |
| 31. Interior lighting: Yes | | 35. Adjustable chimney: Yes | | |
| 32. Safety element: safety thermostat | | | | |

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com