

Product features

Boiling kettle electric indirect 100 l

Model SAP Code 00012282



- Device type: Electric unit
- Device heating type: Indirect
- Steam pressure regulation: Mechanical the valve releases steam at high pressure
- Filling: Mechanical cock
- Jacket filling: Semi-automatic
- Drain: Yes
- Drain valve diameter: 2"
- Basin volume [l]: 100
- Usable volume [l]: 96


SAP Code	00012282	Loading	400 V / 3N - 50 Hz
Net Width [mm]	800	Basin volume [l]	100
Net Depth [mm]	900	Usable volume [l]	96
Net Height [mm]	900	Device heating type	Indirect
Net Weight [kg]	140.00	Steam pressure regulation	Mechanical - the valve releases steam at high pressure
Power electric [kW]	21.000		mgm pressure



Technical drawing

Boiling kettle ele	ectric indirect 100 l
--------------------	-----------------------

Model SAP Code 00012282

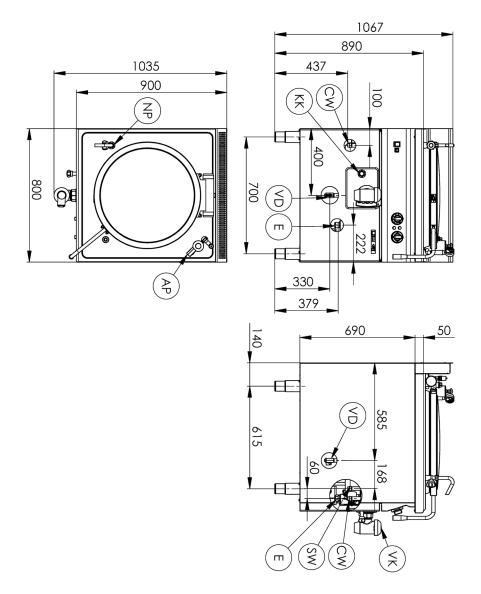



Product benefits

Boiling kettle electric indirect 100 l

Model **SAP Code** 00012282

Semi-automatic tolerance maintenance-free system

the absence of a probe that can become calcified

- savings on service interventions
- avoidance of losses due to interruption of plant operation

Degree of protection of the control elements IPX4

maintenance-free system resistance to splash water long life

- savings on service interventions
- easy cleaning and maintenance of equipment

Smart handle protection against scalding when lifting the lid

easy handling to operate at any height

- high security
- fewer health problems caused by poor ergonomics

Duplicator bottom AISI 316

long service life even in an aggressive salty environment

- savings on service interventions
- avoidance of losses due to interruption of plant operation

All-stainless design including bottom

long service life even in an aggressive salty environment

- savings on service interventions
- easy cleaning and maintenance of equipment

Top pressed plate

it prevents overflowing liquid from running into the controls or onto the operator's feet

- eliminates problems with possible malfunctions
- increases user comfort



Technical parameters

Boiling kettle electric indirect 10	0 l	
Model	SAP Code	00012282
1. SAP Code: 00012282		15. Protection of controls: IPX4
2. Article group: RF-Line 900		16. Material: AISI 304 top plate, AISI 430 cladding
3. Net Width [mm]: 800		17. Indicators: operation and warm-up
4. Net Depth [mm]: 900		18. Drain valve diameter:
5. Net Height [mm]: 900		19. Worktop type: Molded - comfortable cleaning maintenance
6. Net Weight [kg]: 140.00		20. Worktop material: AISI 304
7. Gross Width [mm]: 970		21. Worktop Thickness [mm]: 1.50
8. Gross depth [mm]: 840		22. Device heating type: Indirect
9. Gross Height [mm]: 1160		23. Basin volume [l]: 100
10. Gross Weight [kg]: 163.00		24. Service accessibility: Trough the frontal panel
11. Device type: Electric unit		25. Safety thermostat: Yes
12. Construction type of device: With substructure		26. Adjustable feet: Yes
13. Power electric [kW]: 21.000		27. Bottom material: AISI 316

14. Loading:

400 V / 3N - 50 Hz

28. Usable volume [l]:

96



Technical parameters

conical

Boiling kettle electric indirect 100	t		
Model	SAP Code	00012282	
29. Filling:		33. Overflow:	
Mechanical cock		Yes 	
30. Jacket filling:		34. Manometer:	
Semi-automatic		Yes	
31. Steam pressure regulation:		35. Water filling type:	
Mechanical - the valve releases stea	m at high pressure	Both cold and warm	
32. Type of drain valve:		36. Drain:	

Yes

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com