



Pot and pan washer double skin 50x60 - 400 V

Model SAP Code 00011964




- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 405
- Rack size [mm]: 500 x 600
- Water consumption of the washing cycle: 2,4
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011964	Boiler capacity [l]	6.00
Net Width [mm]	700	Boiler power [kW]	6.000
Net Depth [mm]	600	Basin volume [l]	23
Net Height [mm]	1228	Tank power [kW]	2.100
Net Weight [kg]	74.00	Water consumption of the washing cycle	2,4
Power electric [kW]	8.800	Door clear height [mm]	405
Loading	400 V / 3N - 50 Hz	Rack size [mm]	500 x 600



Technical drawing

Pot and pan washer double skin 50x60 - 400 V		
Model	SAP Code	00011964

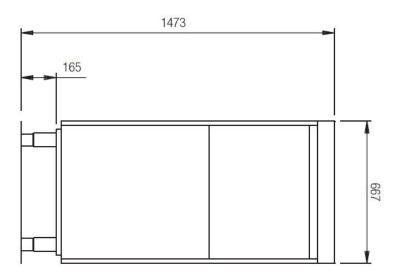

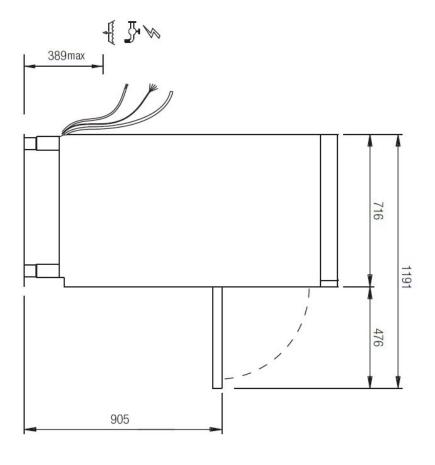

Product benefits



Pot and pan washer double skin 50x60 - 400 V

Model SAP Code 00011964

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

easy cleaning, high hygiene standard, long service life

Stainless steel washing arms

upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

easy and safe handling during cleaning; higher user comfort

LED Display

smartScreen, a large color graphic display showing the washing progress

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

Double pump

unique two-way DuoFlow pump

 distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

Double shell construction

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

Fast heating

10

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

__ Air break tank

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization



Technical parameters


Pot and pan washer double skin 5	0x60 - 400 V	
Model	SAP Code	00011964
1. SAP Code: 00011964		15. Number of programs:
2. Net Width [mm]: 700		16. Opening of device: Tilting down
3. Net Depth [mm]: 600		17. Door clear height [mm]: 405
4. Net Height [mm]:		18. Inlet pressure: 2-4bar
5. Net Weight [kg]: 74.00		19. Adjustable feet: Yes
6. Gross Width [mm]: 700		20. Number of skin:
7. Gross depth [mm]: 800		21. Self-cleaning cycle: Yes
8. Gross Height [mm]: 1250		22. Boiler capacity [l]: 6.00
9. Gross Weight [kg]: 80.00		23. Boiler power [kW]: 6.000
10. Device type: Electric unit		24. Basin volume [l]:
11. Control type: Digital		25. Tank power [kW]: 2.100
12. Material: AISI 304		26. Number of arms for both rinsing and washing:
13. Power electric [kW]: 8.800		27. Arm connection: Click-clack - easy removal with one hand

14. Loading:

400 V / 3N - 50 Hz

28. Washing arm type:

Rotating trident



Pot and pan washer double skin 50x60 - 400 V



Model	SAP Code	00011964	
29. Washing arm material: Composite		40. Energy Saving system: EnergySaving - Energy saving system due to lowering the	
30. Atmospheric boiler with rinse pump: Yes		41. Rinse system: ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure	
31. Rinsing arm type: Rotating trident		42. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle	
32. Rinsing arm material: Composite		43. Quick heating system: QuickReady - System for rapid heating of water in the tank	

34. Rack support:

33. Deep drawn tank:

Pressed

Yes

35. Tank surface strainers:

stainless steel

36. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

37. Thermostop:

38. Boiler thermostat adjust:

39. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

44. Hot water electric valve:

Yes

45. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

46. Rack size [mm]:

500 x 600

47. Display type:

LCD multifunction display

48. USB port:

Yes, for Firmware actualisation

49. Self-diagnostics:

50. Wash pump type:

two-way - DuoFlow



Technical parameters

Pot and pan washer double skin 50x60	400 V
Model SAP	Code 00011964
51. Detergent dispenser: Yes	59. Program ProFessional 8: Yes
52. Rinse aid dispenser: Yes	60. Program ProFessional 10: Yes
53. Water consumption of the washing cy 2,4	cle: 61. Program ProSelf: Yes
54. Rinse water temperature [°C]:	62. Program ProEco: Yes
55. Additional information: The product comes with 1x RM Clean+ 12 and 1x RM Rinse+ 10 kg (00012273) for fre	
56. Program ProFessional 2: Yes	64. Program ProPlates: Yes
57. Program ProFessional 4: Yes	65. Program ProSteel: Yes
58. Program ProFessional 6:	66. Program ProSan:

Yes

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com

Yes