

# Technical data sheet



## Product features

### Fry-top griddle plate electric smooth counter top 230 V

<b>Model</b>	<b>SAP Code</b>	00003101
--------------	-----------------	----------

- Top type: Smooth
- Griddle dimensions [mm x mm]: 365 x 240
- Griddle thickness [mm]: 8.00
- Container for liquid fat: Yes
- Maximum device temperature [°C]: 300
- Surface finish: sandblasted surface without coating

<b>SAP Code</b>	00003101	<b>Power electric [kW]</b>	1.800
<b>Net Width [mm]</b>	388	<b>Loading</b>	230 V / 1N - 50 Hz
<b>Net Depth [mm]</b>	334	<b>Griddle dimensions [mm x mm]</b>	365 x 240
<b>Net Height [mm]</b>	185	<b>Top type</b>	Smooth
<b>Net Weight [kg]</b>	12.00		




# Technical data sheet

Technical drawing



Fry-top griddle plate electric smooth counter top 230 V

<b>Model</b>	<b>SAP Code</b>	00003101
--------------	-----------------	----------

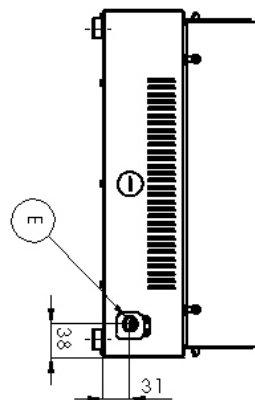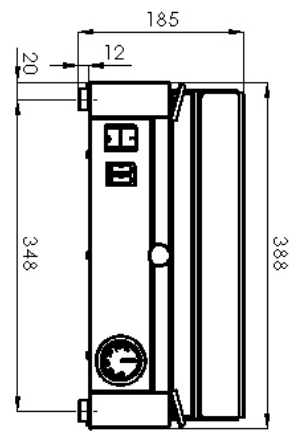

# Technical data sheet



Product benefits

## Fry-top griddle plate electric smooth counter top 230 V

<b>Model</b>	<b>SAP Code</b>	00003101
--------------	-----------------	----------

**1**

### Small dimensions

low space requirements

- also usable for stall sales

# Technical data sheet



## Technical parameters

### Fry-top griddle plate electric smooth counter top 230 V

<b>Model</b>	<b>SAP Code</b>	00003101
--------------	-----------------	----------

**1. SAP Code:**

00003101

**2. Net Width [mm]:**

388

**3. Net Depth [mm]:**

334

**4. Net Height [mm]:**

185

**5. Net Weight [kg]:**

12.00

**6. Gross Width [mm]:**

470

**7. Gross depth [mm]:**

435

**8. Gross Height [mm]:**

230

**9. Gross Weight [kg]:**

15.00

**10. Device type:**

Electric unit

**11. Construction type of device:**

Table top

**12. Power electric [kW]:**

1.800

**13. Loading:**

230 V / 1N - 50 Hz

**14. Protection of controls:**

IPX4

**15. Exterior color of the device:**

Stainless steel

**16. Material:**

Stainless steel

**17. Indicators:**

operation and warm-up

**18. Surface finish:**

sandblasted surface without coating

**19. Maximum device temperature [°C]:**

300

**20. Minimum device temperature [°C]:**

50

**21. Adjustable feet:**

Yes

**22. Griddle dimensions [mm x mm]:**

365 x 240

**23. Griddle thickness [mm]:**

8.00

**24. Container for liquid fat:**

Yes

**25. Uniform heating:**

Yes

**26. Top type:**

Smooth

**27. Power consumption of the zone 1 [kW]:**

1,8