



#### Combi convection steam oven STEAMBOX gas 6x GN 1/1 automatic cleaning boiler

**Model SAP Code** 00008589



- Steam type: Symbiotic boiler and injection combination (patent)
- Number of GN / EN: 6
- GN / EN size in device: GN 1/1
- GN device depth: 65
- Control type: Touchscreen + buttons
- Display size: 9"
- Humidity control: MeteoSystem regulation based on direct measurement of humidity in the chamber (patented)
- Advanced moisture adjustment: Steamtuner 5-stupňový systém nastavení nasycení páry řízenou kombinací produkce bojlerem nebo nástřikem
- Delta T heat preparation: Yes
- Automatic preheating: Yes
- Multi level cooking: Drawer program control of heat treatment for each dish separately
- Door constitution: Vented safety double glass, removable for easy cleaning


SAP Code	00008589	Type of gas	Natural Gas
Net Width [mm]	860	Steam type	Symbiotic - boiler and injection combina-tion (patent)
Net Depth [mm]	795	Number of GN / EN	6
Net Height [mm]	835	GN / EN size in device	GN 1/1
Net Weight [kg]	142.00	GN device depth	65
Power electric [kW]	0.400	Control type	Touchscreen + buttons
Loading	230 V / 1N - 50 Hz	Display size	9"
Power gas [kW]	12.000		




Technical drawing

#### Combi convection steam oven STEAMBOX gas 6x GN 1/1 automatic cleaning boiler

**Model SAP Code** 00008589

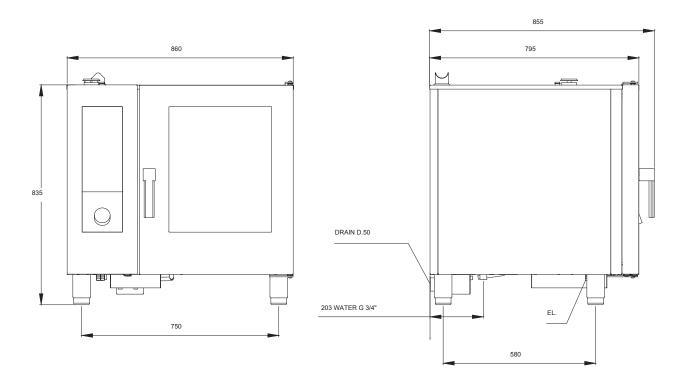

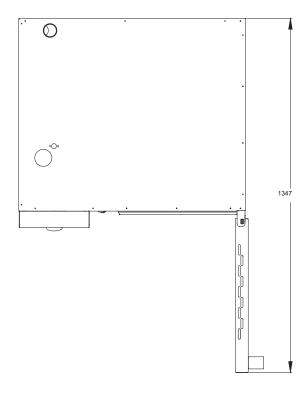





### Combi convection steam oven STEAMBOX gas 6x GN 1/1 automatic cleaning boiler

**Model SAP Code** 00008589

### A symbiotic steam generation system

simultaneous use of direct injection and boiler, maintenance of 100% humidity, possibly its regulation the only Slim type combi oven on the market with a boiler

 preparation of different dishes and cooking styles in an environment precisely set for the food or dish

### **Touch screen display**

simple intuitive control with unique pictograms, all in Czech

the possibility of using preset programs or manual control

 help with cooking even for less skilled cooks, safe baking even in the absence of an operator; create your own recipes; easy to use

### Weather system

patented device for measuring steam saturation in real time and in steam mode, the only one on the market

 precise information for the operator about the steam saturation in the cooking area

#### **Steam tuner**

a control element that enables setting the exact saturation of steam in the cooking chamber during the cooking process

 possibility of cooking different types of cuisine, from very moist steam for typical Czech dishes to lowsaturated steam for e.g. French cuisine

#### Pass-through door

the door is also built into the back of the combi oven, while full control is retained from the side of the cook enables the distribution of the delivery area and the kitchen

 the chef can dispense the food through the convecto machine, the customer can see the preparation and maintenance of the food during dispensing

#### **Adaptation for roasting chickens**

the chamber of the convection oven is designed to collect baked fat, the machine is equipped with a container for collecting fat

 grease does not drain into the sewer, does not destroy the machine's waste system

## A kit of two machines on top of each other

connection kit allowing two machines to be placed on top of each other

connects the connections, inlets, wastes and ventilation of the lower combi oven

 allows the user to place two machines in smaller spaces to increase production; the chef can prepare two different dishes simultaneously

#### Premix burner

the only burner with a turbo pre -mixing gas with air on the market

the structure of the burner to V which prevents backfill and banging

This design saves 30 % of gas compared to conventional burners

- faster heat-up faster more comfortable operation

#### Automatic washing

integrated chamber washing system possibility to use liquid and tablet detergents option to use vinegar as a rinse agent the system simultaneously descales the micro-boiler

 the chamber of the conveyer is washed without the presence of the operator, for example overnight; the system decalcifies the micro-boiler without the need for service intervention; the chamber is maintained in a constant 1% hygienic quality

### Self -supporting shower

drum winch integrated in the body of the kettle the shower is inaccessible when the door is closed

 allows food in the food processor to be rinsed out - if necessary to speed up cooling

## Six-speed fan, reversible with automatic calculation of direction change

in cooperation with the symbiotic system, it ensures perfect steam distribution without losing its richness its operation is controlled by the program or manually

 allows the preparation of a variety of dishes from the most delicate to high temperature baking at the highest speed



## Technical parameters

Combi convection steam oven STEAMBOX gas 6x GN 1/1 automatic cleaning boiler					
Model	SAP Code	00008589			
<b>1. SAP Code:</b> 00008589		14. Type of gas:  Natural Gas			
<b>2. Net Width [mm]:</b> 860		15. Material: AISI 304			
<b>3. Net Depth [mm]:</b> 795		16. Device color: Stainless steel			
4. Net Height [mm]: 835		17. Adjustable feet: Yes			
<b>5. Net Weight [kg]:</b> 142.00		18. Humidity control:  MeteoSystem - regulation based on direct measurement of humidity in the chamber (patented)			
<b>6. Gross Width [mm]:</b> 955		19. Stacking availability: Yes			
<b>7. Gross depth [mm]:</b> 920		20. Control type: Touchscreen + buttons			
8. Gross Height [mm]: 1020		<b>21. Additional information:</b> possibility of reverse door opening - handle on the right side (must be specified when ordering)			
9. Gross Weight [kg]: 152.00		<b>22. Steam type:</b> Symbiotic - boiler and injection combination (patent)			
10. Device type: Combined unit		23. Chimney for moisture extraction: Yes			
11. Power electric [kW]: 0.400		24. Delayed start: Yes			
<b>12. Loading:</b> 230 V / 1N - 50 Hz		25. Display size:			

13. Power gas [kW]:

12.000

Yes

26. Delta T heat preparation:



## Technical parameters

Combi convection steam oven STEAMBOX gas 6x GN 1/1	automatic cleaning boiler	
Model SAP Code	00008589	
<b>27. Automatic preheating:</b> Yes	<b>40. Reversible fan:</b> Yes	
28. Automatic cooling: Yes	<b>41. Sustaince box:</b> Yes	
<b>29. Cold smoke-dry function:</b> Yes	<b>42. Probe:</b> Yes	
<b>30. Unified finishing of meals EasyService:</b> Yes	<b>43. Shower:</b> Hand winder	
31. Night cooking: Yes	<b>44. Distance between the layers [mm]:</b> 70	
<b>32. Washing system:</b> Closed - efficient use of water and washing chemicals by repeated pumping	<b>45. Smoke-dry function:</b> Yes	
<b>33. Detergent type:</b> Liquid washing detergent + liquid rinse aid/vinegar or washing tablets	<b>46. Interior lighting:</b> Yes	
<b>34. Multi level cooking:</b> Drawer program - control of heat treatment for each dish separately	<b>47. Low temperature heat treatment:</b> Yes	
<b>35. Advanced moisture adjustment:</b> Steamtuner - 5-stupňový systém nastavení nasycení páry řízenou kombinací produkce bojlerem nebo nástřikem	<b>48. Number of fans:</b>	
<b>36. Slow cooking:</b> from 30 °C - the possibility of rising	<b>49. Number of fan speeds:</b>	
<b>37. Fan stop:</b> Immediate when the door is opened	<b>50. Number of programs:</b> 1000	
<b>38. Lighting type:</b> LED lighting in the doors, on both sides	<b>51. USB port:</b> Yes, for uploading recipes and updating firmware	

39. Cavity material and shape:

AISI 304, with rounded corners for easy cleaning

**52. Door constitution:** 

Vented safety double glass, removable for easy cleaning



## Technical parameters

Combination of steam and hot air

Combi convection steam oven STEAMBOX gas 6x GN 1/1 automatic cleaning boiler				
Model	SAP Code	00008589		
<b>53. Number of preset programs:</b> 100		<b>58. HACCP:</b> Yes		
<b>54. Number of recipe steps:</b> 9		<b>59. Number of GN / EN:</b>		
55. Minimum device temperature [°C	:]:	60. GN / EN size in device:  GN 1/1		
<b>56. Maximum device temperature [°C</b>	C]:	61. GN device depth: 65		
57. Device heating type:		62. Food regeneration:		

Yes

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com