

### **Product features**

#### Electric fryer 0,77 kW/l, 13 l on cabinet 400 V

**Model SAP Code** 00007379




- Basin volume [l]: 13
- Drain type: Trough the cabinet
- Drain: Yes
- Maximum device temperature [°C]: 190
- Minimum device temperature [°C]: 50
- Material: Stainless steel
- Heating location: Inside the tank
- Ignition: Electric
- Number of baskets: 1
- Basket dimensions [mm x mm x mm]: 210 x 300 x 120


SAP Code	00007379	Basin volume [l]	13
Net Width [mm]	328	Number of basins	1
Net Depth [mm]	609	Number of baskets	1
Net Height [mm]	900	Basket dimensions [mm x mm x mm]	210 x 300 x 120
Net Weight [kg]	32.00	Ratio power/volume [kW/l]	0.77
Power electric [kW]	9.900	Production of fries [kg/h]	14
Loading	400 V / 3N - 50 Hz		



Technical drawing

Electric fryer 0,77 kW/l, 13 l on cabinet 400 V				
Model	SAP Code	00007379		

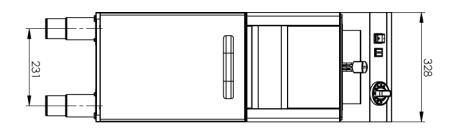

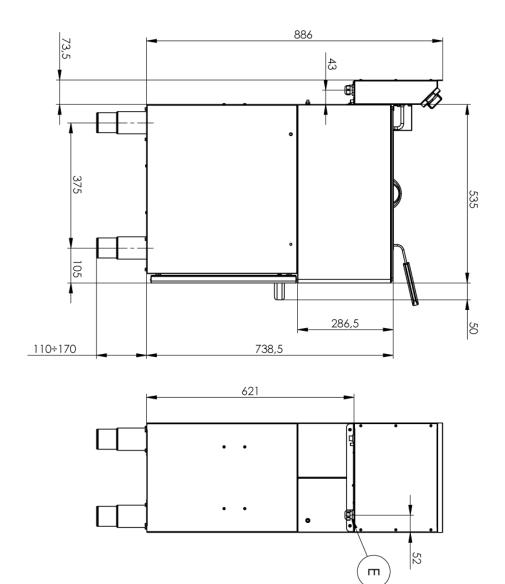



**Product benefits** 

#### Electric fryer 0,77 kW/l, 13 l on cabinet 400 V

Model SAP Code

00007379

#### All-stainless steel bathtub

long life
resistance of AISI 304 stainless steel material
the material does not cut

- savings on service interventions
- easy cleaning and maintenance of equipment

### Degree of protection of the control elements IPX4

maintenance-free system resistance to splash water long life

- savings on service interventions
- easy cleaning and maintenance of equipment

## Outlet into a removable collector in the base with a sieve against coarse dirt

outlet of the bath into the prepared container

- easy and safe handling

#### **Cold zone**

prevents food residues from burning there is no change in the taste of the oil

- longer oil life
- easy access and maintenance

## Removable heating element prevents food residues from burning

prevents food residues from burning there is no change in the taste of the oil

- fully removable electric box with heating element for convenient cleaning and servicing
- easy access even to corners and time saving

#### **Higher rear chimney**

prevention of spontaneous combustion

 safer heat dissipation and separation of oil and ventilation from the fryer

#### 2 thermostats

safety and working thermostat

- traffic safety
- prevention of spontaneous combustion
- Prevention of oil flashover



### Technical parameters

Electric fryer 0,77 kW/l, 13 l on cabir	400 V
Model	<b>Code</b> 00007379
<b>1. SAP Code:</b> 00007379	<b>15. Ignition:</b> Electric
<b>2. Article group:</b> RF-Line 600	<b>16. Protection of controls:</b> IPX4
3. Net Width [mm]: 328	<b>17. Material:</b> Stainless steel
<b>4. Net Depth [mm]:</b> 609	18. Indicators:  operation and warm-up
5. Net Height [mm]:	19. Worktop type:  Molded - comfortable cleaning maintenance
6. Net Weight [kg]: 32.00	20. Worktop material:  AISI 304
7. Gross Width [mm]: 675	21. Worktop Thickness [mm]:  0.80
8. Gross depth [mm]: 365	22. Standard equipment for device:  lid and basket
9. Gross Height [mm]: 1090	23. Basin volume [l]:
<b>10. Gross Weight [kg]:</b> 38.00	24. Maximum device temperature [°C]:
11. Device type:  Electric unit	25. Minimum device temperature [°C]: 50
<b>12. Construction type of device:</b> With substructure	26. Safety thermostat up to x ° C:  235
13. Power electric [kW]: 9.900	27. Adjustable feet: Yes

14. Loading:

400 V / 3N - 50 Hz

28. Heating element material:

AISI 304



### Technical parameters

Electric fryer 0,77 kW/l, 13 l on cabinet 400 V	
Model SAP Code	00007379
29. Number of baskets:	<b>34. Production of fries [kg/h]:</b> 14
30. Number of basins:	<b>35. Heating element construction:</b> Large surface area coiled heating element for extended service life and even heating of the oil bath
31. Basket dimensions [mm x mm x mm]: 210 × 300 × 120	<b>36. Drain type:</b> Trough the cabinet
<b>32. Basin material:</b> AISI 304 - High quality stainless steel	<b>37. Drain:</b> Yes
33. Ratio power/volume [kW/l]:	38. Heating location:

Inside the tank

0.77