

# Technical data sheet

## Product features



### Boiling kettle gas indirect autoclave 150 l

<b>Model</b>	<b>SAP Code</b>	00006244
--------------	-----------------	----------



- Device type: Gas unit
- Device heating type: Indirect
- Ignition: Electric
- Steam pressure regulation: Automatic - the pressure switch regulates the performance of the device
- Filling: Semi-automatic
- Jacket filling: Semi-automatic
- Drain: Yes
- Drain valve diameter: 2"
- Basin dimensions [mm x mm x mm]: 600 x 540
- Basin volume [l]: 150
- Usable volume [l]: 150

<b>SAP Code</b>	00006244	<b>Type of gas</b>	Propane butane, natural gas
<b>Net Width [mm]</b>	800	<b>Basin volume [l]</b>	150
<b>Net Height [mm]</b>	1045	<b>Usable volume [l]</b>	150
<b>Net Weight [kg]</b>	140.00	<b>Basin dimensions [mm x mm x mm]</b>	600 x 540
<b>Loading</b>	230 V / 1N - 50 Hz	<b>Device heating type</b>	Indirect
<b>Power gas [kW]</b>	22.500	<b>Steam pressure regulation</b>	Automatic - the pressure switch regulates the performance of the device

# Technical data sheet

Technical drawing




## Boiling kettle gas indirect autoclave 150 l

Model

SAP Code

00006244

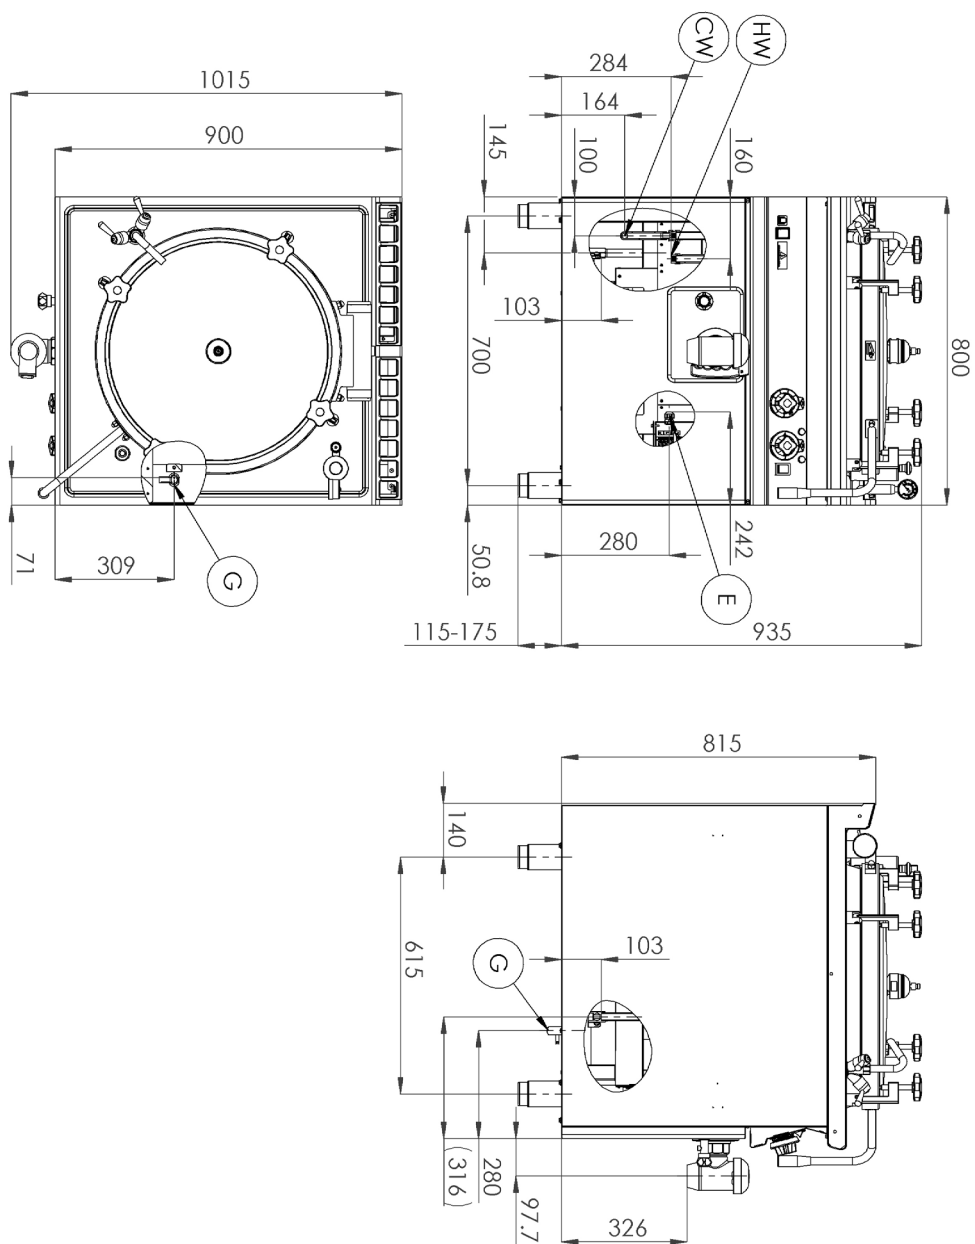

# Technical data sheet

## Product benefits



### Boiling kettle gas indirect autoclave 150 l

Model

SAP Code

00006244

1

#### Safety element – thermocouple

safe service for staff  
there is no unnecessary gas leakage  
long life

- savings on service interventions
- easier and faster operation

2

#### Semi-automatic tolerance

maintenance-free system  
the absence of a probe that can become calcified  
long life

- savings on service interventions
- avoidance of losses due to interruptions in plant operation

3

#### Degree of protection of the control elements IPX4

maintenance-free system  
resistance to splash water  
long life

- savings on service interventions
- easy cleaning and maintenance of equipment

4

#### Smart handle

protection against scalding when lifting the lid  
easy handling to operate at any height

- high security
- fewer health problems caused by poor ergonomics

5

#### Duplicator bottom AISI 316

protection against scalding when lifting the lid  
easy handling to operate at any height

- savings on service interventions
- avoidance of losses due to interruptions in plant operation

6

#### All-stainless design including bottom

the material does not rust, including the bottom  
wear resistance of AISI 304 material  
long life

- savings on service interventions
- easy cleaning and maintenance of equipment

7

#### Upper hygienic molding with an opening for the drainage of excess contents

spilled or overflowing liquids around the boiler neck can drain into the waste

- easier to keep the workplace clean
- easier to maintain hygiene standards
- easier cleaning of the boiler surface

8

#### Filling taps for hot and cold water

the possibility of filling the boiler with water from above

- easier filling and draining of water
- easier to wash with hot water
- convenient faucet control on top of the boiler

# Technical data sheet

## Technical parameters



### Boiling kettle gas indirect autoclave 150 l

Model

SAP Code

00006244

**1. SAP Code:**

00006244

**2. Net Width [mm]:**

800

**3. Net Height [mm]:**

1045

**4. Net Weight [kg]:**

140.00

**5. Gross Width [mm]:**

970

**6. Gross depth [mm]:**

840

**7. Gross Height [mm]:**

1170

**8. Gross Weight [kg]:**

150.00

**9. Device type:**

Gas unit

**10. Construction type of device:**

Stationary

**11. Loading:**

230 V / 1N - 50 Hz

**12. Power gas [kW]:**

22.500

**13. Ignition:**

Electric

**14. Type of gas:**

Propane butane, natural gas

**15. Protection of controls:**

IPX4

**16. Device color:**

Stainless steel

**17. Material:**

AISI 304

**18. Indicators:**

operation and warm-up

**19. Drain valve diameter:**

2"

**20. Worktop type:**

Molded - comfortable cleaning maintenance

**21. Device heating type:**

Indirect

**22. Basin volume [l]:**

150

**23. Basin dimensions [mm x mm x mm]:**

600 x 540

**24. Safety thermocouple:**

Yes

**25. Adjustable feet:**

Yes

**26. Bottom material:**

AISI 316

**27. Usable volume [l]:**

150

**28. Filling:**

Semi-automatic

# Technical data sheet

Technical parameters



## Boiling kettle gas indirect autoclave 150 l

**Model**

**SAP Code**

00006244

**29. Jacket filling:**

Semi-automatic

**33. Manometer:**

Yes

**30. Steam pressure regulation:**

Automatic - the pressure switch regulates the performance of the device

**34. Water filling type:**

Cold

**31. Type of drain valve:**

conical

**35. Drain:**

Yes

**32. Overflow:**

Yes