

Technical data sheet

Product features



Undercounter dishwasher double skin softener 50x50 - 400 V

Model	SAP Code	00011292
-------	----------	----------



- Display type: LCD multifunction display
- Number of programs: 13
- Number of skin: 2
- Door clear height [mm]: 285
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle: 2,2
- Washing cycle time [s]: 90-120-150
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

SAP Code	00011292	Boiler power [kW]	4.900
Net Width [mm]	600	Basin volume [l]	15
Net Depth [mm]	600	Tank power [kW]	1.400
Net Height [mm]	720	Water consumption of the washing cycle	2,2
Net Weight [kg]	56.00	Washing cycle time [s]	90-120-150
Power electric [kW]	6.770	Door clear height [mm]	285
Loading	400 V / 3N - 50 Hz	Rack size [mm]	500 x 500
Boiler capacity [l]	6.00		

Technical data sheet

Technical drawing




Undercounter dishwasher double skin softener 50x50 - 400 V

Model

SAP Code

00011292

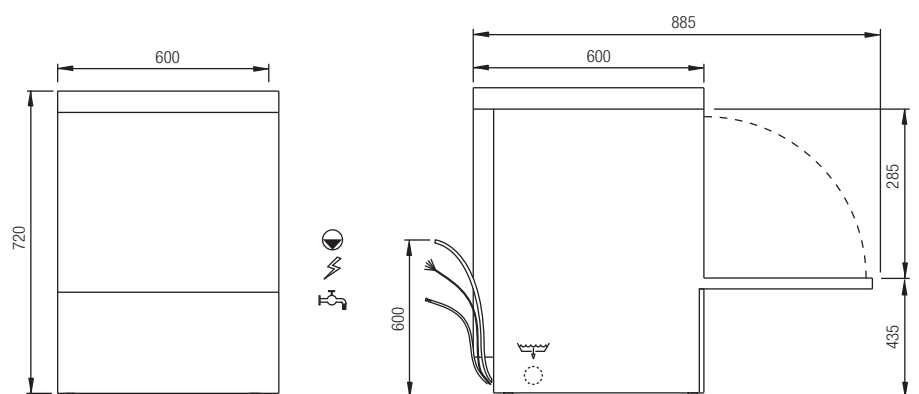

Technical data sheet

Product benefits



Undercounter dishwasher double skin softener 50x50 - 400 V

Model	SAP Code	00011292
-------	----------	----------

1

Stainless steel outer shell construction

- round construction with stainless steel, rounded edges, Deep-drawn bathtub
- easy cleaning, high hygiene standard, long service life

2

Washing arms with a component, common for washing and rinsing

- upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal
- easy and safe handling during cleaning
 - increased user comfort

3

LED Display

- proScreen 4 local display + 2 LED strips
- easy control of the dishwasher operation
 - continuous information on the status of the wash cycle
 - diagnostics in the event of a fault

4

Double pump

- unique two-way DuoFlow pump
- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

Molded basket supports

- guide rails for the baskets molded from the body of the dishwasher
- high hygiene standard
 - longer service life

6

Detergent dispensers

- two detergent and rinse aid dispensers
- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

Double filter system

- the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency
- higher washing efficiency; longer life of the washing bath

8

Energy saving

- energy saving energy saving system due to lowering the temperature of the boiler
- cost saving

9

Protection of fragile dishes

- softstart system for gradual start of washing programs to protect fragile dishes
- protects stemmed glasses and other fragile utensils

10

Double shell construction

- stainless steel construction with insulated double jacket
- quiet operation
 - energy saving

11

Fast heating

- performance management allows the current running of the boiler and basins body
- quick first warm-up of the dishwasher
 - smooth operation

Technical data sheet

Technical parameters



Undercounter dishwasher double skin softener 50x50 - 400 V

Model	SAP Code	00011292
-------	----------	----------

1. SAP Code:

00011292

2. Article group:

Dishwashers line TT

3. Net Width [mm]:

600

4. Net Depth [mm]:

600

5. Net Height [mm]:

720

6. Net Weight [kg]:

56.00

7. Gross Width [mm]:

650

8. Gross depth [mm]:

650

9. Gross Height [mm]:

770

10. Gross Weight [kg]:

64.00

11. Device type:

Electric unit

12. Control type:

Digital

13. Material:

Stainless steel

14. Power electric [kW]:

6.770

15. Loading:

400 V / 3N - 50 Hz

16. Number of programs:

13

17. Opening of device:

Tilting down

18. Door clear height [mm]:

285

19. Adjustable feet:

Yes

20. Number of skin:

2

21. Self-cleaning cycle:

Yes

22. Boiler capacity [l]:

6.00

23. Boiler power [kW]:

4.900

24. Basin volume [l]:

15

25. Tank power [kW]:

1.400

26. Number of arms for both rinsing and washing:

2

27. Arm connection:

Hand loosen/tighten screw

28. Washing arm type:

Rotatable two-pronged

Technical data sheet

Technical parameters



Undercounter dishwasher double skin softener 50x50 - 400 V

Model

SAP Code

00011292

29. Washing arm material:

Stainless steel

30. Atmospheric boiler with rinse pump:

Yes

31. Rinsing arm type:

Rotating two-pronged

32. Rinsing arm material:

Stainless steel

33. Deep drawn tank:

Yes

34. Rack support:

Pressed

35. Tank surface strainers:

stainless steel

36. Drain filter:

Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste

37. Thermostop:

Yes

38. Boiler thermostat adjust:

Yes

39. Rack feed capacity:

40-30-24

40. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

41. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

42. Rinse system:

ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure

43. Heating system:

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

44. Quick heating system:

QuickReady - System for rapid heating of water in the tank

45. Hot water electric valve:

Yes

46. Closing door system:

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

47. Rack size [mm]:

500 x 500

48. Display type:

LCD multifunction display

49. USB port:

Yes, for Firmware actualisation

50. Drain pump:

Yes

Technical data sheet

Technical parameters



Undercounter dishwasher double skin softener 50x50 - 400 V

Model

SAP Code

00011292

51. Self-diagnostics:

Yes

52. Wash pump type:

two-way - DuoFlow

53. Detergent dispenser:

Yes

54. Rinse aid dispenser:

Yes

55. Water consumption of the washing cycle:

2,2

56. Washing cycle time [s]:

90-120-150

57. Rinse water temperature [°C]:

80

58. Standard equipment for device:

1x glass basket, 1x plate basket, 1x cutlery basket

59. Additional information:

The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free

60. Program ProSpeed:

Yes

61. Program ProFessional:

Yes

62. Program ProTemp:

Yes

63. Program ProClean:

Yes

64. Program ProDrain:

Yes

65. Program ProEco:

Yes

66. Program ProNew:

Yes

67. Program ProLong:

Yes

68. Program ProGlass:

Yes

69. Program ProWater:

Yes

70. Program ProActive:

Yes

71. Program ProSteel:

Yes

72. Program ProSan:

Yes