

Technical data sheet



Product features

Cooking range gas with static gas oven GN 2/1 - 4x burner ECO

Model	SAP Code	00110111
--------------	-----------------	----------



- Device type: Gas unit
- Power consumption of the zone 1 [kW]: 6
- Power consumption of the zone 2 [kW]: 6
- Power consumption of the zone 3 [kW]: 6
- Power consumption of the zone 4 [kW]: 3,5
- Type of internal part of the appliance 1 (eg oven): Gas
- Type of internal part of the appliance 2 (eg oven): Static
- Material: AISI 304 top plate, AISI 430 cladding

SAP Code	00110111	Power consumption of the zone 2 [kW]	6
Net Width [mm]	800	Power consumption of the zone 3 [kW]	6
Net Depth [mm]	700	Power consumption of the zone 4 [kW]	3,5
Net Height [mm]	900	Type of internal part of the appliance 1 (eg oven)	Gas
Net Weight [kg]	84.00	Type of internal part of the appliance 2 (eg oven)	Static
Power gas [kW]	27.500	Width of internal part [mm]	657
Type of gas	Natural gas, propane butane	Depth of internal part [mm]	558
Number of zones	4	Height of internal part [mm]	355
Power consumption of the zone 1 [kW]	6	Diameter of device [mm]	100




Technical data sheet



Technical drawing

Cooking range gas with static gas oven GN 2/1 - 4x burner ECO

Model	SAP Code	00110111
-------	----------	----------

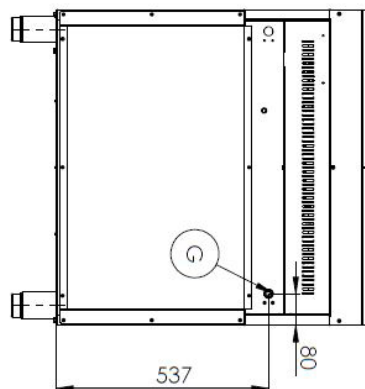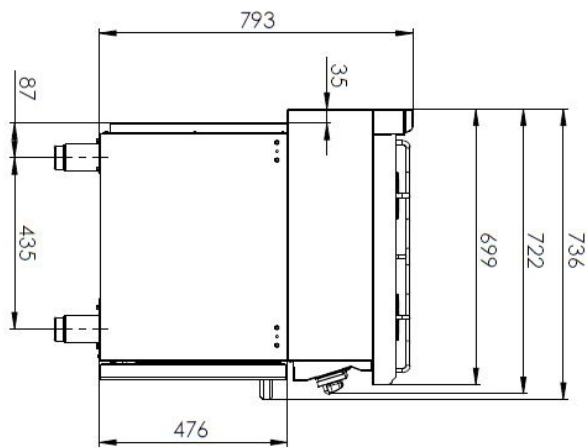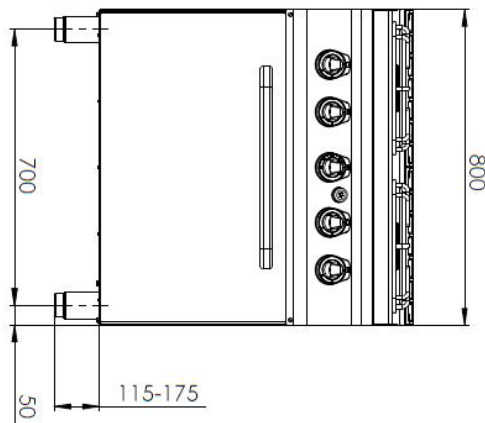

Cooking range gas with static gas oven GN 2/1 - 4x burner ECO

Model	SAP Code	00110111
--------------	-----------------	----------

1

Massive construction of burners

- high performance and efficiency
- cast iron burners removable
- long life
 - energy saving (perfect combustion)
 - time saving for food preparation
 - easy maintenance/cleaning

2

Hygienic moldings of the top plate

- absence of sharp corners and edges (potential places where dirt could stick)
- smooth transitions
 - easy quick cleaning

3

Degree of protection of the control elements IPX4

- maintenance-free system
- resistance to splash water
- long life
 - savings on service interventions
 - easy cleaning and maintenance of equipment

4

All-stainless design

- long life
- resistance of a ground steel plate with a thickness of 10 mm
 - savings on service interventions
 - higher corrosion resistance

5

Safety element – thermocouple

- safe operation for personnel
- there is no overheating and damage to the thallus
- long life
 - savings on service interventions
 - easier and faster operation

6

Large electric oven with four positions for racks with static cooking

- possibility of baking
- high capacity and variability
- all-stainless design
 - suitable for yeast dishes and desserts
 - long service life
 - easy to clean

Technical data sheet



Technical parameters

Cooking range gas with static gas oven GN 2/1 - 4x burner ECO

Model	SAP Code	00110111
--------------	-----------------	----------

1. SAP Code:

00110111

2. Net Width [mm]:

800

3. Net Depth [mm]:

700

4. Net Height [mm]:

900

5. Net Weight [kg]:

84.00

6. Gross Width [mm]:

840

7. Gross depth [mm]:

800

8. Gross Height [mm]:

975

9. Gross Weight [kg]:

107.00

10. Device type:

Gas unit

11. Construction type of device:

With substructure

12. Power gas [kW]:

27.500

13. Type of gas:

Natural gas, propane butane

14. Material:

AISI 304 top plate, AISI 430 cladding

15. Worktop material:

AISI 304

16. Worktop Thickness [mm]:

1.20

17. Number of zones:

4

18. Power consumption of the zone 1 [kW]:

6

19. Power consumption of the zone 2 [kW]:

6

20. Power consumption of the zone 3 [kW]:

6

21. Power consumption of the zone 4 [kW]:

3,5

22. Number of power control stages:

6

23. Adjustable feet:

Yes

24. Number of burners/hot plates:

4

25. Diameter of device [mm]:

100

26. Type of gas cooking zones:

Cast iron burners

27. Type of internal part of the appliance 1 (eg oven):

Gas

28. Type of internal part of the appliance 2 (eg oven):

Static

Technical data sheet



Technical parameters

Cooking range gas with static gas oven GN 2/1 - 4x burner ECO

Model	SAP Code	00110111
--------------	-----------------	----------

29. Width of internal part [mm]:

657

32. Maximum temperature of the inner chamber [°C]:

300

30. Depth of internal part [mm]:

558

33. Minimum temperature of the inner chamber [°C]:

50

31. Height of internal part [mm]:

355