Undercounter dishwasher double skin with drain pump 40x40 - 230 V

2.60





Undercounter dishwasher double skin with drain pump 40x40 - 230 V						
Model	SAP Code	00011285				
			lisplay + 2 LED bars ag cycle: 1,9 0 n: ProDose - accurate Flow filtration with overflow of clean water to waste			
SAP Code	00011285	Boiler power [kW]	2.600			
Net Width [mm]	556	Basin volume [l]	8			
Net Depth [mm]	466	Tank power [kW]	0.600			
Net Height [mm]	695	Water consumption of the washing cycle	1,9			
Net Weight [kg]	46.00	Washing cycle time [s]	90-120-150			
Power electric [kW]	3.500	Door clear height [mm]	320			
Loading	230 V / 1N - 50 Hz	Rack size [mm]	400 x 400			

Boiler capacity [l]


Technical drawing









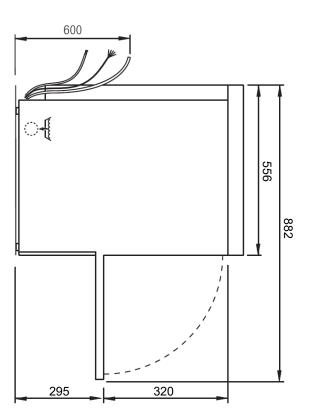

**Product benefits** 





Technical parameters



Undercounter dishwasher double	skin with drain pun	np 40x40 - 230 V
Model	SAP Code	00011285
<b>1. SAP Code:</b> 00011285		<b>15. Loading:</b> 230 V / 1N - 50 Hz
<b>2. Article group:</b> Dishwashers line N		<b>16. Number of programs:</b>
<b>3. Net Width [mm]:</b> 556		<b>17. Opening of device:</b> Tilting down
<b>4. Net Depth [mm]:</b> 466		<b>18. Door clear height [mm]:</b> 320
<b>5. Net Height [mm]:</b> 695		<b>19. Inlet pressure:</b> 2-4bar
<b>6. Net Weight [kg]:</b> 46.00		<b>20. Adjustable feet:</b> Yes
<b>7. Gross Width [mm]:</b> 516		<b>21. Number of skin:</b>
8. Gross depth [mm]: 606		<b>22. Self-cleaning cycle:</b> Yes
<b>9. Gross Height [mm]:</b> 745		<b>23. Boiler capacity [ l ]:</b> 2.60
<b>10. Gross Weight [kg]:</b> 49.00		<b>24. Boiler power [kW]:</b> 2.600
1. Device type: Electric unit		<b>25. Basin volume [l]:</b>
2. Control type: Digital		<b>26. Tank power [kW]:</b> 0.600
<b>3. Material:</b> Stainless steel		<b>27. Number of arms for both rinsing and washing:</b>
<b>14. Power electric [kW]:</b> 3.500		<b>28. Arm connection:</b> Click-clack - easy removal with one hand

Technical parameters



Model SAP Code	00011285
<b>29. Washing arm type:</b> Rotatable two-pronged	<b>41. Energy Saving system:</b> EnergySaving - Energy saving system due to lowering the boiler temperature
<b>30. Washing arm material:</b> Composite	<b>42. Heating system:</b> HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle
<b>31. Rinsing arm type:</b>	<b>43. Hot water electric valve:</b>
Rotating two-pronged	Yes
<b>32. Rinsing arm material:</b> Composite	<b>44. Closing door system:</b> ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes
<b>33. Deep drawn tank:</b>	<b>45. Rack size [mm]:</b>
Yes	400 × 400
<b>34. Rack support:</b>	<b>46. Display type:</b>
Pressed	ProScreen - 4 digit display + 2 LED bars
<b>35. Tank surface strainers:</b>	<b>47. USB port:</b>
composite	Yes, for Firmware actualisation
<b>36. Drain filter:</b> ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste	<b>48. Drain pump:</b> Yes
<b>37. Thermostop:</b>	<b>49. Self-diagnostics:</b>
Yes	Yes
<b>38. Boiler thermostat adjust:</b>	<b>50. Wash pump type:</b>
Yes	two-way - DuoFlow
<b>39. Rack feed capacity:</b>	<b>51. Detergent dispenser:</b>
24-30-40	Yes

Technical parameters



Undercounter dishwasher double skin with drain pump 40x40 - 230 V						
Model	SAP Code	00011285				
<ul> <li>53. Water consumption of the washing cycle: 1,9</li> <li>54. Washing cycle time [s]: 90-120-150</li> </ul>		<b>59. Program ProFessional:</b> Yes				
		60. Program ProTemp: Yes				
55. Rinse water temperature [°C]: 65		<b>61. Program ProClean:</b> Yes				
<b>56. Standard equipment for device:</b> 1x glass basket, 1x plate basket, 1x cutlery basket		<b>62. Program ProDrain:</b> Yes				
<b>57. Additional information:</b> The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free		<b>63. Program ProPlates:</b> Yes				
		-				

#### 58. Program ProSpeed:

Yes