

# Technical data sheet

## Product features



### Undercounter dishwasher double skin 50x50 - 400 V

Model	SAP Code	00011288
-------	----------	----------



- Display type: ProScreen - 4 digit display + 2 LED bars
- Number of programs: 7
- Number of skin: 2
- Door clear height [mm]: 465
- Rack size [mm]: 500 x 500
- Water consumption of the washing cycle: 1,8
- Washing cycle time [s]: 60-90-180
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

<b>SAP Code</b>	00011288	<b>Boiler power [kW]</b>	6.000
<b>Net Width [mm]</b>	600	<b>Basin volume [l]</b>	15
<b>Net Depth [mm]</b>	600	<b>Tank power [kW]</b>	1.400
<b>Net Height [mm]</b>	1250	<b>Water consumption of the washing cycle</b>	1,8
<b>Net Weight [kg]</b>	63.00	<b>Washing cycle time [s]</b>	60-90-180
<b>Power electric [kW]</b>	7.900	<b>Door clear height [mm]</b>	465
<b>Loading</b>	400 V / 3N - 50 Hz	<b>Rack size [mm]</b>	500 x 500
<b>Boiler capacity [ l ]</b>	6.00		


# Technical data sheet

Technical drawing



Undercounter dishwasher double skin 50x50 - 400 V

Model	SAP Code	00011288
-------	----------	----------

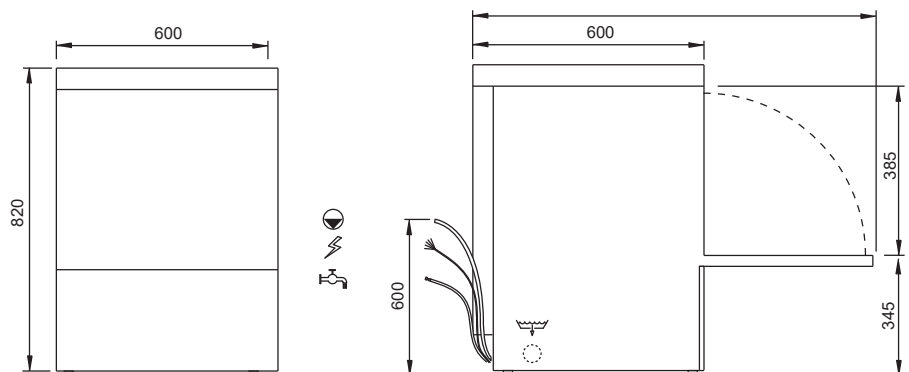

# Technical data sheet

## Product benefits



### Undercounter dishwasher double skin 50x50 - 400 V

Model

SAP Code

00011288

1

#### **Stainless steel outer shell construction**

round construction with stainless steel, rounded edges, Deep-drawn bathtub

- easy cleaning, high hygiene standard, long service life

2

#### **Washing arms with a component, common for washing and rinsing**

upper and lower composite swivel arms common for washing and rinsing with clickclack system for easy removal

- easy and safe handling during cleaning; higher user comfort

3

#### **LED Display**

proScreen 4 local display + 2 LED strips

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

#### **Double pump**

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

#### **Molded basket supports**

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

6

#### **Detergent dispensers**

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

#### **Double filter system**

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

8

#### **Energy saving**

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving

9

#### **Protection of fragile dishes**

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

10

#### **Double shell construction**

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

11

#### **Fast heating**

performance management allows the current running of the boiler and basins body

- quick first warm-up of the dishwasher
- smooth operation

# Technical data sheet

## Technical parameters



### Undercounter dishwasher double skin 50x50 - 400 V

#### Model

#### SAP Code

00011288

#### 1. SAP Code:

00011288

#### 2. Article group:

Dishwashers line N

#### 3. Net Width [mm]:

600

#### 4. Net Depth [mm]:

600

#### 5. Net Height [mm]:

1250

#### 6. Net Weight [kg]:

63.00

#### 7. Gross Width [mm]:

650

#### 8. Gross depth [mm]:

650

#### 9. Gross Height [mm]:

1300

#### 10. Gross Weight [kg]:

69.00

#### 11. Device type:

Electric unit

#### 12. Control type:

Digital

#### 13. Material:

Stainless steel

#### 14. Power electric [kW]:

7.900

#### 15. Loading:

400 V / 3N - 50 Hz

#### 16. Number of programs:

7

#### 17. Opening of device:

Tilting down

#### 18. Door clear height [mm]:

465

#### 19. Inlet pressure:

2-4bar

#### 20. Adjustable feet:

Yes

#### 21. Number of skin:

2

#### 22. Self-cleaning cycle:

Yes

#### 23. Boiler capacity [ l ]:

6.00

#### 24. Boiler power [kW]:

6.000

#### 25. Basin volume [l]:

15

#### 26. Tank power [kW]:

1.400

#### 27. Number of arms for both rinsing and washing:

2

#### 28. Arm connection:

Click-clack - easy removal with one hand

# Technical data sheet

## Technical parameters



### Undercounter dishwasher double skin 50x50 - 400 V

**Model**

**SAP Code**

00011288

**29. Washing arm type:**

Rotatable two-pronged

**30. Washing arm material:**

Composite

**31. Rinsing arm type:**

Rotating two-pronged

**32. Rinsing arm material:**

Composite

**33. Deep drawn tank:**

Yes

**34. Rack support:**

Pressed

**35. Tank surface strainers:**

composite

**36. Drain filter:**

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

**37. Thermostop:**

Yes

**38. Boiler thermostat adjust:**

Yes

**39. Rack feed capacity:**

60-40-20

**40. Detergent and rinse pump system:**

ProDose - accurate dosing with a peristaltic pump

**41. Energy Saving system:**

EnergySaving - Energy saving system due to lowering the boiler temperature

**42. Heating system:**

HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for starting the next cycle

**43. Hot water electric valve:**

Yes

**44. Closing door system:**

ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes

**45. Rack size [mm]:**

500 x 500

**46. Display type:**

ProScreen - 4 digit display + 2 LED bars

**47. USB port:**

Yes, for Firmware actualisation

**48. Self-diagnostics:**

Yes

**49. Wash pump type:**

two-way - DuoFlow

**50. Detergent dispenser:**

Yes

**51. Rinse aid dispenser:**

Yes

**52. Water consumption of the washing cycle:**

1,8

# Technical data sheet

## Technical parameters



### Undercounter dishwasher double skin 50x50 - 400 V

Model	SAP Code	
-------	----------	--

#### 53. Washing cycle time [s]:

60-90-180

#### 54. Rinse water temperature [°C]:

80

#### 55. Standard equipment for device:

1x glass basket, 1x plate basket, 1x cutlery basket

#### 56. Additional information:

The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free

#### 57. Program ProSpeed:

Yes

#### 58. Program ProFessional:

Yes

#### 59. Program ProTemp:

Yes

#### 60. Program ProSelf:

Yes

#### 61. Program ProEco:

Yes

#### 62. Program ProLong:

Yes

#### 63. Program ProGlass:

Yes