

Technical data sheet



Product features

Undercounter dishwasher single skin 39x39 - 230 V

| | | |
|--------------|-----------------|----------|
| Model | SAP Code | 00011265 |
|--------------|-----------------|----------|



- Display type: 3 local display + diode bar
- Number of programs: 4
- Number of skin: 1
- Door clear height [mm]: 320
- Rack size [mm]: 390 x 390
- Water consumption of the washing cycle: 1,6
- Washing cycle time [s]: 60-120-150
- Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump
- Wash pump type: two-way - DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

| | | | |
|------------------------------|--------------------|---|------------|
| SAP Code | 00011265 | Boiler power [kW] | 2.600 |
| Net Width [mm] | 436 | Basin volume [l] | 8 |
| Net Depth [mm] | 535 | Tank power [kW] | 0.600 |
| Net Height [mm] | 670 | Water consumption of the washing cycle | 1,6 |
| Net Weight [kg] | 31.00 | Washing cycle time [s] | 60-120-150 |
| Power electric [kW] | 3.500 | Door clear height [mm] | 320 |
| Loading | 230 V / 1N - 50 Hz | Rack size [mm] | 390 x 390 |
| Boiler capacity [l] | 2.60 | Noise of device | 61,5 |

Technical data sheet





Technical drawing

Undercounter dishwasher single skin 39x39 - 230 V

Model

SAP Code

00011265

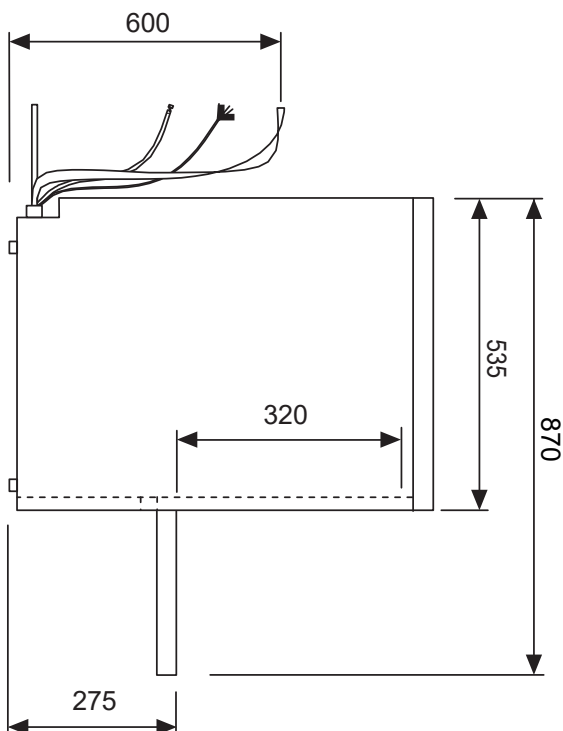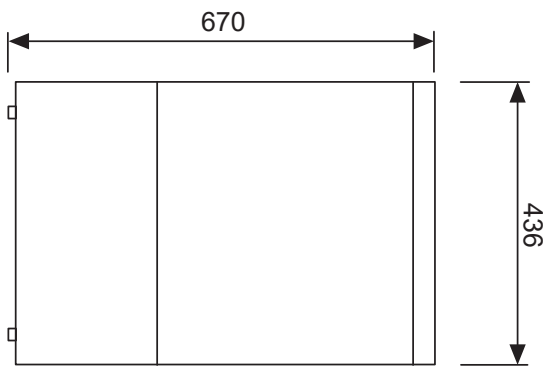

Undercounter dishwasher single skin 39x39 - 230 V

Model

SAP Code

00011265

1

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, partially pressed tub

- easy cleaning, high hygiene standard, long service life

2

Washing arms with a component, common for washing and rinsing

washing arms made of composite material
common arm for washing and rinsing
integrated screw secured against falling out

- easy and safe handling during cleaning; higher user comfort

3

LED Display

three-line display
diode strip

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

4

Double pump

unique two-way DuoFlow pump

- distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

5

Molded basket supports

guide rails for the baskets molded from the body of the dishwasher

- high hygiene standard
- longer service life

6

Detergent dispensers

two detergent and rinse aid dispensers

- precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

7

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

- higher washing efficiency; longer life of the washing bath

8

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

- cost saving

Technical data sheet



Technical parameters

Undercounter dishwasher single skin 39x39 - 230 V

| | | |
|--------------|-----------------|----------|
| Model | SAP Code | 00011265 |
|--------------|-----------------|----------|

1. SAP Code:

00011265

2. Net Width [mm]:

436

3. Net Depth [mm]:

535

4. Net Height [mm]:

670

5. Net Weight [kg]:

31.00

6. Gross Width [mm]:

486

7. Gross depth [mm]:

585

8. Gross Height [mm]:

720

9. Gross Weight [kg]:

34.00

10. Device type:

Electric unit

11. Control type:

Digital

12. Material:

AISI 304

13. Power electric [kW]:

3.500

14. Loading:

230 V / 1N - 50 Hz

15. Number of programs:

4

16. Opening of device:

Tilting down

17. Door clear height [mm]:

320

18. Inlet pressure:

2-4bar

19. Adjustable feet:

Yes

20. Number of skin:

1

21. Self-cleaning cycle:

Yes

22. Boiler capacity [l]:

2.60

23. Boiler power [kW]:

2.600

24. Basin volume [l]:

8

25. Tank power [kW]:

0.600

26. Number of arms for both rinsing and washing:

2

27. Arm connection:

Hand loosen/tighten screw

28. Washing arm type:

Rotatable two-pronged

Technical data sheet



Technical parameters

Undercounter dishwasher single skin 39x39 - 230 V

Model

SAP Code

00011265

29. Washing arm material:

Composite

30. Rinsing arm type:

Rotating two-pronged

31. Rinsing arm material:

Composite

32. Rack support:

Pressed

33. Tank surface strainers:

composite

34. Drain filter:

ArchiMedes - double filtration with overflow discharge ensures only 18% loss of clean water to waste

35. Thermostop:

Yes

36. Boiler thermostat adjust:

Yes

37. Rack feed capacity:

24-30-60

38. Detergent and rinse pump system:

ProDose - accurate dosing with a peristaltic pump

39. Energy Saving system:

EnergySaving - Energy saving system due to lowering the boiler temperature

40. Hot water electric valve:

Yes

41. Rack size [mm]:

390 x 390

42. Display type:

3 local display + diode bar

43. USB port:

Yes, for Firmware actualisation

44. Self-diagnostics:

Yes

45. Wash pump type:

two-way - DuoFlow

46. Detergent dispenser:

Yes

47. Rinse aid dispenser:

Yes

48. Water consumption of the washing cycle:

1,6

49. Washing cycle time [s]:

60-120-150

50. Rinse water temperature [Å°C]:

65

51. Standard equipment for device:

2x glass basket, 1x cutlery basket

52. Program ProSpeed:

Yes

53. Program ProFessional:

Yes

54. Program ProTemp:

Yes

Technical data sheet



Technical parameters

Undercounter dishwasher single skin 39x39 - 230 V

Model

SAP Code

00011265

55. Program ProSelf:

Yes

56. Noise of device:

61,5