



Pot and pan washer double skin with drain pump 55x61 - 400 V

Model SAP Code 00011967



- Display type: LCD multifunction display
- Number of programs: 11
- Number of skin: 2
- Door clear height [mm]: 650
- Rack size [mm]: 560 x 630
- Water consumption of the washing cycle: 3
- Detergent and rinse pump system: ProDose accurate dosing with a peristaltic pump
- Wash pump type: two-way DuoFlow
- Self-cleaning cycle: Yes
- Drain filter: Evolution3 double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste


SAP Code	00011967	Power electric [kW]	10.500
Net Width [mm]	782	Loading	400 V / 3N - 50 Hz
Net Depth [mm]	719	Water consumption of the washing cycle	3
Net Height [mm]	1727	Door clear height [mm]	650
Net Weight [kg]	148.00	Rack size [mm]	560 x 630




Technical drawing

Pot and pan washer double skin with drain pump 55x61 - 400 V

Model SAP Code 00011967

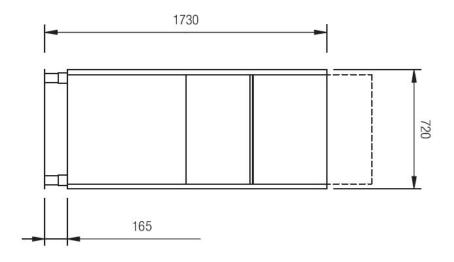

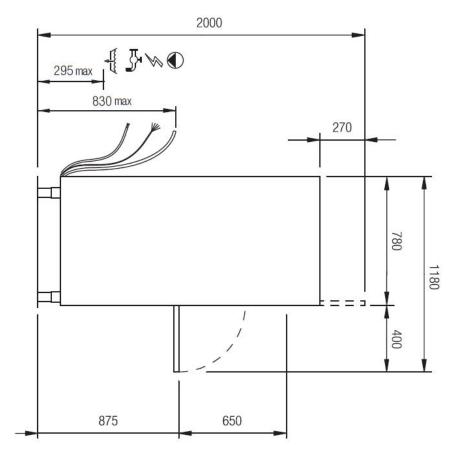





Pot and pan washer double skin with drain pump 55x61 - 400 V

Model SAP Code 00011967

Stainless steel outer shell construction

round construction with stainless steel, rounded edges, Deep-drawn bathtub

easy cleaning, high hygiene standard, long service life

Stainless steel washing arms

upper and lower arms with stainless steel, separated for washing and rinsing, triple upper arm

easy and safe handling during cleaning; higher user comfort

LED Display

smartScreen, a large color graphic display showing the washing progress

- easy control of the dishwasher operation
- continuous information on the status of the wash cycle
- diagnostics in the event of a fault

Double pump

unique two-way DuoFlow pump

 distributes the water pressure evenly between the upper and lower arms; no noise; allows the use of a weaker pump

Detergent dispensers

two detergent and rinse aid dispensers

 precise chemical dosing by ProDose - precise dosing system for detergent and rinse aid by peristaltic pump setting of values via control panel

Double filter system

the chamber filter and the waste filter together with the ArchiMedes system provide a discharge system with increased water purification efficiency

higher washing efficiency; longer life of the washing bath

Energy saving

energy saving energy saving system due to lowering the temperature of the boiler

cost saving

Protection of fragile dishes

softstart system for gradual start of washing programs to protect fragile dishes

- protects stemmed glasses and other fragile utensils

Double shell construction

stainless steel construction with insulated double jacket

- quiet operation
- energy saving

Fast heating

10

performance management allows the current running of the boiler and basins body

- guick first warm-up of the dishwasher
- smooth operation

Air break tank

the open system of the boiler rinse, in cooperation with the rinse pump, ensures a constant pressure and temperature of the rinse

 possibility to use in HACCP systems water temperature suitable for sterilization



Technical parameters

Pot and pan washer double skin with drain pump 55x61 - 400 V				
Model	SAP Code	00011967		
1. SAP Code: 00011967		15. Number of programs:		
2. Net Width [mm]: 782		16. Opening of device: Tilting down		
3. Net Depth [mm]: 719		17. Door clear height [mm]: 650		
4. Net Height [mm]: 1727		18. Inlet pressure: 2-4bar		
5. Net Weight [kg]: 148.00		19. Adjustable feet: Yes		
6. Gross Width [mm]: 870		20. Number of skin:		
7. Gross depth [mm]: 890		21. Self-cleaning cycle: Yes		
8. Gross Height [mm]: 2200		22. Number of arms for both rinsing and washing:		
9. Gross Weight [kg]: 157.00		23. Arm connection: Click-clack - easy removal with one hand		
10. Device type: Electric unit		24. Washing arm type: Rotating trident		
11. Control type: Digital		25. Washing arm material: Composite		
12. Material: AISI 304		26. Atmospheric boiler with rinse pump: Yes		
13. Power electric [kW]: 10.500		27. Rinsing arm type: Rotating trident		

14. Loading:

400 V / 3N - 50 Hz

28. Rinsing arm material:

Composite



Technical parameters

Pot and pan washer double skin with drain pump 55x61 -	400 V	
Model SAP Code	00011967	
20. Doop drawn tapke	40. Hot water electric valve:	
29. Deep drawn tank: Yes	Yes	
30. Rack support: Pressed	41. Closing door system: ProSoft - Reduces noise, dampens the door stop, which could cause damage to dishes	
31. Tank surface strainers: stainless steel	42. Rack size [mm]: 560 x 630	
32. Drain filter: Evolution3 - double filtration with electronically controlled partial discharge before the rinsing phase ensures 0% loss of clean water to waste	43. Display type: LCD multifunction display	
33. Thermostop: Yes	44. USB port: Yes, for Firmware actualisation	
34. Boiler thermostat adjust: Yes	45. Drain pump: Yes	
35. Detergent and rinse pump system: ProDose - accurate dosing with a peristaltic pump	46. Self-diagnostics: Yes	
36. Energy Saving system: EnergySaving - Energy saving system due to lowering the boiler temperature	47. Wash pump type: two-way - DuoFlow	
37. Rinse system: ProRinse - composite arms common for rinsing and washing with geometry for spraying water in thin jets directly against the dishes, the rinsing pump ensures constant pressure	48. Detergent dispenser: Yes	
38. Heating system: HotWash - System of simultaneous operation of the heating element of the bath and the boiler, reducing the time for	49. Rinse aid dispenser: Yes	

starting the next cycle

39. Quick heating system:

QuickReady - System for rapid heating of water in the tank

3

50. Water consumption of the washing cycle:



Technical parameters

57. Program ProFessional 10:

Yes

Pot and pan washer double skin v	vith drain pump 55x61	- 400 V	
Model	SAP Code	00011967	
51. Rinse water temperature [°C]: 80-85		58. Program ProClean: Yes	
52. Additional information: The product comes with 1x RM Clean+ 12 kg (00012271) and 1x RM Rinse+ 10 kg (00012273) for free		59. Program ProDrain: Yes	
53. Program ProFessional 2: Yes		60. Program ProEco: Yes	
54. Program ProFessional 4: Yes		61. Program ProLong: Yes	
55. Program ProFessional 6: Yes		62. Program ProActive 5: Yes	
56. Program ProFessional 8: Yes		63. Program ProActive 7: Yes	

tel.: +420 381 582 284 e-mail: rmgastro@rmgastro.com web: www.rmgastro.com